VT100 14-PORT DOCK

The fastest way to host multiple VT100 cameras for simultaneous rapid charging, configuration and video downloading.




GENERAL INFORMATION	l de la companya de
Product Code	VT-100-DOCK14/US, VT-100-DOCK14/ROW, VT-100-DOCK14/UK, VT-100-DOCK14/EU, VT-100-DOCK14/AUS
Hosts Multiple VT100s	14 VT100 camera ports
Scalability	Up to six 14-Port Docks can be connected to a DockController
Compatibility	Compatible with DockController DC-200
Easy To Deploy	Connection is a single USB to the DockController, and a mains adaptor for power (USB cable supplied)
	Eliminates need for separate wiring to each camera
Speedy Plug-in/Pull-out Connectivity	VT100s can be easily docked or undocked for speedy use
Flexible Docking	Flexible for use with camera accessories attached
	Can be securely fastened to a shelf or other mounting surface - can be secured at an angle
Warranty	1 year return-to-manufacturer warranty including email and telephone support Extended warranty available

SIZE AND WEIGHT	
Dimensions	7.9 x 1.5 x 17.2 in (200 x 38 x 436 mm)
Weight	4.9 lb (2.2 kg)

CHARGING AND POWER	
Charging	Up to 5hrs from a fully flat battery
Power Requirement	12V/5A PSU, input 100-240V (PSU supplied)
Interface	USB 2.0 compatible USB 3.0 compatible
Operating Temperature	32° to 104°F (0° to 40°C)
Storage Temperature	-67° to 158°F (-55° to 70°C)



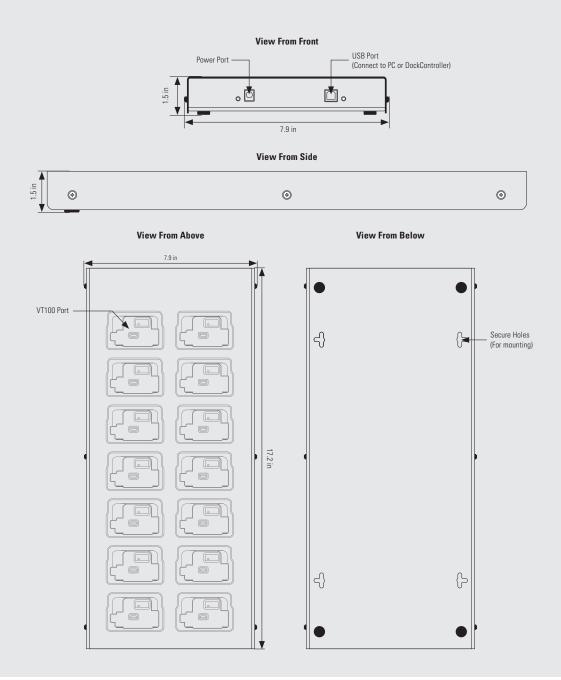

For more information, please visit: www.motorolasolutions.com/BWC



 $Motorola\ Solutions\ Inc.,\ 500\ W\ Monroe\ St,\ Chicago,\ IL\ 60661.\ U.S.A.\ \ \textbf{motorolasolutions.com}$